

FUTRUS® KURVO SINK MODULE- CURVED LEFT CONTOURED SINK AND COUNTERTOP WITH PLUMBING ENCLOSURE MADE FROM SOLID SURFACE

MODEL FKURVO_L

Specification Sheet

Division 22 Plumbing Manufacturers


FEATURES

- Solid surface sink
- Seamless & bleach cleanable
- Anti-ligature design
- Range of sizes & drain locations
- Resists mold, virus & bacteria growth
- Low maintenance
- Stain, impact & chip resistant
- Optional overflow integration
- Repairable
- Easy installation
- Available in all solid surface colors
- Solid surface plumbing enclosure
- No order minimums



STANDARD CORIAN® COLOR OPTIONS

Color*	Code	Description
	GW	Glacier White
	CW	Cameo White
	BI	Bisque
	BN	Bone
	VY	Silver Gray
	ALT	Alternate/Custom

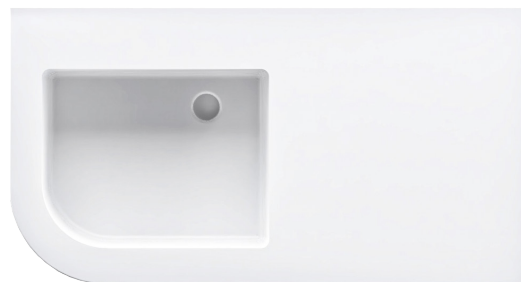

Color tiles are for reference only* See all color options on futrus.com

OPTIONAL UPGRADES

Code	Description
BS	Backsplash*
CS	Coved backsplash
TR	Tamper resistant/fully enclosed

Standard is no backsplash*

CORIAN® SOLID SURFACE CERTIFICATIONS

All Corian® & Corian® Quartz materials are:

- GREENGUARD certified to resist the growth of viruses, bacteria & mold
- Class 1 (Class A) fire rated
- GREENGUARD Gold
- GREENGUARD Indoor Air Quality Certified
- Contributes to LEED certification credits




FUTRUS® KURVO SINK MODULE- CURVED LEFT CONTOURED SINK AND COUNTERTOP WITH PLUMBING ENCLOSURE MADE FROM SOLID SURFACE


MODEL FKURVO_L

Specification Sheet

Division 22 Plumbing Manufacturers

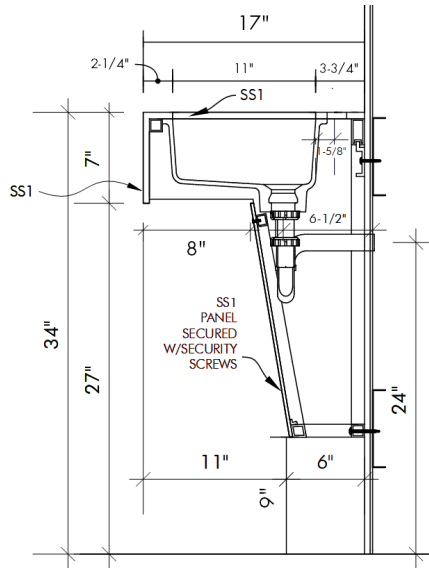

Side Cross Section

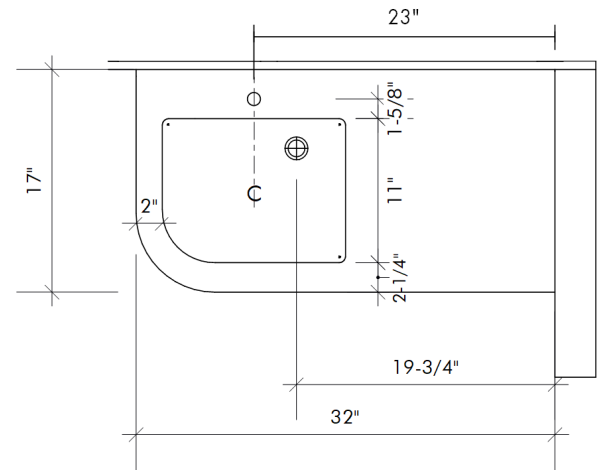

Top View

STANDARD SIZES

Dimensions (Inches)

Code	Width	Depth	Apron
FKURVO_L	32"	17"	7"
CUSTOM			

TECHNICAL INFORMATION

- All dimensions are nominal
- Futrus® 1-year limited warranty
- Corian® 10-year material warranty

EXAMPLE MODEL SPECIFICATION

FKURVO_L_GW_BS

(Model_Corion Color_Optional Extra)

RECOMMENDED SPECIFICATION- PLUMBING FIXTURES SECTION 22

The Futrus Kurvo Sink Module- Curved Left, model FKURVO_L. Basin, countertop, backsplash and sidesplash fabricated from seamless solid surface. Module designed to be ligature-resistant with a solid surface tamperproof plumbing enclosure. All framing components shall be made of moisture resistant stainless steel. Standard lavatory height at 34" to conform with ANSI, UFAS and ADA standards. Division 22 Plumbing Fixtures.



futrus.com
info@futrus.com